

Exterior Wood





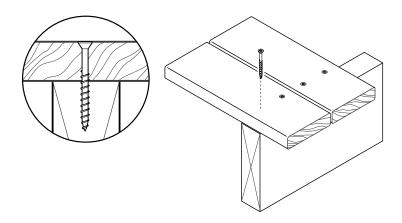

Square







Flat Head w/ Nibs

Flat Head

QuickGrab" Point

Type 17 Point

Description

For general purpose exterior wood projects such as decks, fences, siding, and lattices.

Specifications

Size | Gauge: #6 to #10 **Length:** 1 1/4 in. to 6 in. Head Type: Flat, Flat w/nibs Recess Type: T20 Star, T25 Star,

#2 Square, #2 LOX®

Thread Type: Single Lead and

Double Lead, Coarse

Finish: GrabberGard®, Stainless Steel **Quality Assurance:** Grabber[®] fasteners are manufactured in ISO 9001 and ISO 14001 certified and approved factories.

LEED Reporting: The post-consumer

recycled steel content is 25%.

Applications

- Exterior wood-to-wood applications
- General exterior wood construction
- Decking
- Fencing

Siding

- Lattice
- Docks

Installation

- Use a standard screw gun with a depthsensitive nose piece. Suggested screw gun specification for optimal performance: sizes #6 to #10, up to 4,000 RPM.
- The flat head is fully seated when it is flush with the work surface.
- The fastener should penetrate the wood at least 5/8 in., in accordance with AWC-NDS for wood construction.
- Overdriving may result in failure of the fastener.

Features

- Square recess is a precision recess designed for secure bit engagement in wood-to-wood applications.
- Star recess provides consistent, reliable performance in wood-to-wood applications.
- LOX® recess allows for ultimate torque and will not strip out like most other recesses.
- The flat head design provides better holding power in wood-to-wood applications.

- Underhead nibs ensure flush countersinking.
- Type 17 point is designed to smoothly penetrate wood without cracking the surface.
- QuickGrab[™] point starts immediately and drives into most common wood species without predrilling.


Exterior Wood



Standard Corrosion **Test Results**

| Finish | Test | Standard/Protocol | Results |
|--------------|------------|-------------------|-------------------------|
| GrabberGard® | Salt Spray | ASTM B117 | 1,000 hrs., no red rust |

Note: Salt Spray Testing (SST) results are not intended to predict corrosion in real-world environments. The ASTM B117 standard for SST is recognized industry-wide as an effective tool for comparing different metals and different metal coatings in a tightly controlled, highly corrosive environment for specific periods of time. For more information about corrosion resistance, refer to Grabber's Coatings and Corrosion Resistance Classifications in the Technical Data section of Grabber Fastener Solutions, PG1000. Consult with a corrosion specialist or the architect or engineer of record for detailed guidance and recommendations specific to your project.

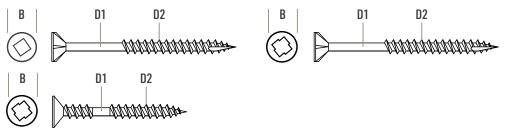

Product Dimensions

| Size | B Head Dia. | Recess | D1 Minor Dia. | D2 Major Dia. | TPI ¹ |
|------------|-------------|-----------|---------------|---------------|------------------|
| #6 | 0.303 in. | T20 Star | 0.091 in. | 0.138 in. | 10 |
| #7 | 0.303 in. | T20 Star | 0.100 in. | 0.151 in. | 9 |
| #1 | 0.303 in. | T20 Star | 0.100 in. | 0.151 in. | 7 |
| | 0.309 in. | #2 Square | 0.116 in. | 0.164 in. | 8 |
| | 0.318 in. | T20 Star | 0.110 in. | 0.164 in. | 9 |
| #8 | 0.323 in. | #2 LOX® | 0.118 in. | 0.164 in. | 8 |
| | 0.323 in. | T20 Star | 0.118 in. | 0.164 in. | 9 |
| | 0.354 in. | #2 LOX® | 0.118 in. | 0.164 in. | 8 |
| " 0 | 0.335 in. | T20 Star | 0.122 in. | 0.177 in. | 8 |
| | 0.337 in. | #2 Square | 0.124 in. | 0.177 in. | 8 |
| #9 | 0.337 in. | #2 LOX® | 0.124 in. | 0.177 in. | 8 |
| | 0.354 in. | #2 LOX® | 0.126 in. | 0.177 in. | 9 |
| #10 | 0.354 in. | #2 LOX® | 0.134 in. | 0.190 in. | 8 |
| | 0.358 in. | T25 Star | 0.132 in. | 0.190 in. | 8 |
| | 0.362 in. | T25 Star | 0.124 in. | 0.190 in. | 8 |
| | 0.363 in. | #2 Square | 0.132 in. | 0.190 in. | 8 |

 $^{{}^{1}\}text{TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.}$

Ordering Information and Product Options

| Item No. | Size | Recess | Head Diameter | TPI ¹ | Quantity | Weight | Special Features |
|----------------|---------------|-----------|------------------|------------------|----------|--------|--|
| GrabberGard® G | ay | | | | | | |
| 78125RG | 8 x 1 1/4 in. | #2 Square | 0.309 in. | 8 | 6,000 | 30 lb. | - - Woody, Underhead nibs, Type 17 point - |
| 78150RG | 8 x 1 1/2 in. | #2 Square | 0.309 in. | 8 | 5,000 | 31 lb. | |
| 78175RG | 8 x 1 3/4 in. | #2 Square | 0.309 in. | 8 | 4,000 | 28 lb. | |
| 78200RG | 8 x 2 in. | #2 Square | 0.309 in. | 8 | 3,000 | 25 lb. | |
| 78250RG | 9 x 2 1/2 in. | #2 Square | 0.337 in. | 8 | 2,500 | 30 lb. | |
| 78275RG | 9 x 2 3/4 in. | #2 Square | 0.337 in. | 8 | 2,000 | 25 lb. | |

¹TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.

Exterior Wood



Ordering Information and Product Options (continued)

| Item No. | Size | Recess | Head Diameter | TPI ¹ | Quantity | Weight | Special Features | | |
|----------------|-------------------------------|-----------|------------------|------------------|----------|--------|--------------------------------------|--|--|
| GrabberGard® G | GrabberGard® Gray (continued) | | | | | | | | |
| 783008RG | 8 x 3 in. | #2 Square | 0.309 in. | 8 | 2,000 | 28 lb. | | | |
| 78300RG | 9 x 3 in. | #2 Square | 0.337 in. | 8 | 2,000 | 28 lb. | | | |
| 78350RG | 10 x 3 1/2 in. | #2 Square | 0.363 in. | 8 | 1,000 | 20 lb. | | | |
| 78400RG | 10 x 4 in. | #2 Square | 0.363 in. | 8 | 1,000 | 23 lb. | | | |
| 78500RG | 10 x 5 in. | #2 Square | 0.363 in. | 8 | 1,000 | 26 lb. | | | |
| 78600RG | 10 x 6 in. | #2 Square | 0.363 in. | 8 | 1,000 | 33 lb. | Woody, Underhead nibs, Type 17 point | | |
| WL8150RG | 8 x 1 1/2 in. | #2 LOX® | 0.309 in. | 8 | 5,000 | 29 lb. | | | |
| WL8200RG | 8 x 2 in. | #2 LOX® | 0.309 in. | 8 | 3,000 | 24 lb. | | | |
| WL9250RG | 9 x 2 1/2 in. | #2 LOX® | 0.337 in. | 8 | 2,500 | 29 lb. | | | |
| WL9300RG | 9 x 3 in. | #2 LOX® | 0.337 in. | 8 | 2,000 | 28 lb. | | | |
| W10400RG | 10 x 4 in. | #2 LOX® | 0.363 in. | 8 | 1,000 | 22 lb. | | | |
| G6125G | 6 x 1 1/4 in. | T20 Star | 0.303 in. | 10 | 8,000 | 30 lb. | | | |
| G6150G | 6 x 1 1/2 in. | T20 Star | 0.303 in. | 10 | 5,000 | 22 lb. | | | |
| G7200G | 7 x 2 in. | T20 Star | 0.303 in. | 9 | 3,500 | 23 lb. | | | |
| G8225G | 8 x 2 1/4 in. | T20 Star | 0.318 in. | 9 | 3,000 | 27 lb. | | | |
| G8250G | 8 x 2 1/2 in. | T20 Star | 0.318 in. | 9 | 2,500 | 24 lb. | | | |
| G8300G | 8 x 3 in. | T20 Star | 0.318 in. | 9 | 2,000 | 23 lb. | | | |
| G9300G | 9 x 3 in. | T20 Star | 0.335 in. | 8 | 2,000 | 27 lb. | | | |
| G10350G | 10 x 3 1/2 in. | T25 Star | 0.358 in. | 8 | 1,000 | 19 lb. | | | |
| G10400G | 10 x 4 in. | T25 Star | 0.358 in. | 8 | 1,000 | 21 lb. | | | |
| G10500G | 10 x 5 in. | T25 Star | 0.358 in. | 8 | 1,000 | 27 lb. | | | |
| G6125GG | 6 x 1 1/4 in. | T20 Star | 0.303 in. | 10 | 8,000 | 30 lb. | | | |
| G6150GG | 6 x 1 1/2 in. | T20 Star | 0.303 in. | 10 | 5,000 | 22 lb. | | | |
| G7200GG | 7 x 2 in. | T20 Star | 0.303 in. | 9 | 3,500 | 23 lb. | | | |
| G8225GG | 8 x 2 1/4 in. | T20 Star | 0.318 in. | 9 | 3,000 | 27 lb. | | | |
| G8250GG | 8 x 2 1/2 in. | T20 Star | 0.318 in. | 9 | 2,500 | 24 lb. | | | |
| G8300GG | 8 x 3 in. | T20 Star | 0.318 in. | 9 | 2,000 | 23 lb. | - Underhead nibs, QuickGrab™ point | | |
| G9300GG | 9 x 3 in. | T20 Star | 0.335 in. | 8 | 2,000 | 27 lb. | | | |
| G10350GG | 10 x 3 1/2 in. | T25 Star | 0.358 in. | 8 | 1,000 | 19 lb. | | | |
| G10400GG | 10 x 4 in. | T25 Star | 0.358 in. | 8 | 1,000 | 21 lb. | | | |
| G10500GG | 10 x 5 in. | T25 Star | 0.358 in. | 8 | 1,000 | 27 lb. | | | |
| G6125GB | 6 x 1 1/4 in. | T20 Star | 0.303 in. | 10 | 8,000 | 30 lb. | | | |
| G6150GB | 6 x 1 1/2 in. | T20 Star | 0.303 in. | 10 | 5,000 | 22 lb. | | | |
| G7200GB | 7 x 2 in. | T20 Star | 0.303 in. | 9 | 3,500 | 23 lb. | | | |
| G8225GB | 8 x 2 1/4 in. | T20 Star | 0.318 in. | 9 | 3,000 | 27 lb. | | | |
| G8250GB | 8 x 2 1/2 in. | T20 Star | 0.318 in. | 9 | 2,500 | 24 lb. | | | |
| G8300GB | 8 x 3 in. | T20 Star | 0.318 in. | 9 | 2,000 | 23 lb. | | | |
| G9300GB | 9 x 3 in. | T20 Star | 0.335 in. | 8 | 2,000 | 27 lb. | | | |
| G10350GB | 10 x 3 1/2 in. | T25 Star | 0.358 in. | 8 | 1,000 | 19 lb. | | | |
| G10400GB | 10 x 4 in. | T25 Star | 0.358 in. | 8 | 1,000 | 21 lb. | | | |
| G10500GB | 10 x 5 in. | T25 Star | 0.358 in. | 8 | 1,000 | 27 lb. | | | |

¹TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.

Exterior Wood



Ordering Information and Product Options (continued)

| Item No. | Size | Recess | Head Diameter | TPI ¹ | Quantity | Weight | Special Features | |
|----------------|-----------------|-----------|------------------|------------------|----------|--------|--------------------------------------|--|
| GrabberGard® G | ray (continued) | | | | | | | |
| C8200L2M | 8 x 2 in. | #2 LOX® | 0.354 in. | 8 | 1,000 | 5lb. | Collated, QuickGrab™ point | |
| C8250L2M | 8 x 2 1/2 in. | #2 LOX® | 0.354 in. | 8 | 1,000 | 5lb. | | |
| C9300L2M | 9 x 3 in. | #2 LOX® | 0.354 in. | 8 | 1,000 | 5lb. | | |
| C10158JBWG2 | 10 x 1 5/8 in. | #2 LOX® | 0.354 in. | 8 | 1,000 | 5lb. | Collated | |
| C8200TXG2 | 8 x 2 in. | #2 LOX® | 0.323 in. | 8 | 1,000 | 5lb. | | |
| C8300TXG2 | 8 x 3 in. | #2 LOX® | 0.323 in. | 8 | 1,000 | 5lb. | | |
| GrabberGard® G | reen | | | | | | | |
| 78125GRG | 8 x 1 1/4 in. | #2 Square | 0.309 in. | 8 | 6,000 | 30 lb. | | |
| 78150GRG | 8 x 1 1/2 in. | #2 Square | 0.309 in. | 8 | 5,000 | 31 lb. | | |
| 78175GRG | 8 x 1 3/4 in. | #2 Square | 0.309 in. | 8 | 4,000 | 28 lb. | | |
| 78200GRG | 8 x 2 in. | #2 Square | 0.309 in. | 8 | 3,000 | 25 lb. | | |
| 782508GRG | 8 x 2 1/2 in. | #2 Square | 0.309 in. | 8 | 2,500 | 25 lb. | Woody, Underhead nibs, Type 17 point | |
| 783008GRG | 8 x 3 in. | #2 Square | 0.309 in. | 8 | 2,000 | 24 lb. | | |
| 78350GRG | 10 x 3 1/2 in. | #2 Square | 0.363 in. | 8 | 1,000 | 20 lb. | | |
| 78400GRG | 10 x 4 in. | #2 Square | 0.363 in. | 8 | 1,000 | 23 lb. | | |
| 78500GRG | 10 x 5 in. | #2 Square | 0.363 in. | 8 | 1,000 | 26 lb. | | |
| GrabberGard® R | ed | | | | | | | |
| WL8200RGR | 8 x 2 in. | #2 LOX® | 0.309 in. | 8 | 3,000 | 24 lb. | | |
| WL9250RGR | 9 x 2 1/2 in. | #2 LOX® | 0.337 in. | 8 | 2,500 | 29 lb. | Woody, Underhead nibs, Type 17 point | |
| WL9300RGR | 9 x 3 in. | #2 LOX® | 0.337 in. | 8 | 2,000 | 28 lb. | | |
| G6125GR | 6 x 1 1/4 in. | T20 Star | 0.303 in. | 10 | 8,000 | 30 lb. | | |
| G6150GR | 6 x 1 1/2 in. | T20 Star | 0.303 in. | 10 | 5,000 | 22 lb. | | |
| G7200GR | 7 x 2 in. | T20 Star | 0.303 in. | 7 | 3,500 | 23 lb. | | |
| G8225GR | 8 x 2 1/4 in. | T20 Star | 0.318 in. | 9 | 3,000 | 27 lb. | | |
| G8250GR | 8 x 2 1/2 in. | T20 Star | 0.318 in. | 9 | 2,500 | 24 lb. | Hadanbaad niba Owiak CrahTM naint | |
| G8300GR | 8 x 3 in. | T20 Star | 0.318 in. | 9 | 2,000 | 23 lb. | - Underhead nibs, QuickGrab™ point | |
| G9300GR | 9 x 3 in. | T20 Star | 0.335 in. | 8 | 2,000 | 27 lb. | | |
| G10350GR | 10 x 3 1/2 in. | T25 Star | 0.358 in. | 8 | 1,000 | 19 lb. | | |
| G10400GR | 10 x 4 in. | T25 Star | 0.358 in. | 8 | 1,000 | 21 lb. | | |
| G10500GR | 10 x 5 in. | T25 Star | 0.358 in. | 8 | 1,000 | 27 lb. | | |
| GrabberGard® B | rown | | | | | | | |
| 78125BRG | 8 x 1 1/4 in. | #2 Square | 0.309 in. | 8 | 6,000 | 30 lb. | | |
| 78150BRG | 8 x 1 1/2 in. | #2 Square | 0.309 in. | 8 | 5,000 | 31 lb. | | |
| 78175BRG | 8 x 1 3/4 in. | #2 Square | 0.309 in. | 8 | 4,000 | 28 lb. | | |
| 78200BRG | 8 x 2 in. | #2 Square | 0.309 in. | 8 | 3,000 | 25 lb. | | |
| 782508BRG | 8 x 2 1/2 in. | #2 Square | 0.309 in. | 8 | 2,500 | 25 lb. | Woody, Underhead nibs, Type 17 point | |
| 783008BRG | 8 x 3 in. | #2 Square | 0.309 in. | 8 | 2,000 | 24 lb. | | |
| 78350BRG | 10 x 3 1/2 in. | #2 Square | 0.363 in. | 8 | 1,000 | 20 lb. | | |
| 78400BRG | 10 x 4 in. | #2 Square | 0.363 in. | 8 | 1,000 | 23 lb. | | |
| 78500BRG | 10 x 5 in. | #2 Square | 0.363 in. | 8 | 1,000 | 26 lb. | | |

¹TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.

Exterior Wood



Ordering Information and Product Options (continued)

| Item No. | Size | Recess | Head Diameter | TPI ¹ | Quantity | Weight | Special Features |
|-------------------|----------------|----------|------------------|------------------|----------|--------|----------------------------------|
| 305 Stainless Ste | el | | | | | | |
| GTST125 | 8 x 1 1/4 in. | T20 Star | 0.323 in. | 9 | 5,000 | 30 lb. | |
| GTST150 | 8 x 1 1/2 in. | T20 Star | 0.323 in. | 9 | 4,000 | 32 lb. | |
| GTST200 | 8 x 2 in. | T20 Star | 0.323 in. | 9 | 3,000 | 33 lb. | |
| GTST250 | 10 x 2 1/2 in. | T25 Star | 0.362 in. | 8 | 2,000 | 24 lb. | |
| GTST300 | 10 x 3 in. | T25 Star | 0.362 in. | 8 | 1,500 | 21 lb. | |
| GTST350 | 10 x 3 1/2 in. | T25 Star | 0.362 in. | 8 | 1,000 | 20 lb. | Underhead nibs, QuickGrab™ point |
| GTST400 | 10 x 4 in. | T25 Star | 0.362 in. | 8 | 1,000 | 20 lb. | |
| GTST8250 | 8 x 2 1/2 in. | T20 Star | 0.323 in. | 9 | 2,500 | 26 lb. | |
| GTST8300 | 8 x 3 in. | T20 Star | 0.323 in. | 9 | 1,000 | 25 lb. | |
| GTST8350 | 8 x 3 1/2 in. | T20 Star | 0.323 in. | 9 | 1,000 | 26 lb. | |
| GTST8400 | 8 x 4 in. | T20 Star | 0.323 in. | 9 | 1,000 | 27 lb. | |

¹TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.

Note: Product availability is subject to change without prior notice and the availability of products may differ from what is printed in literature and displayed on our website.

The items listed are bulk size. Most are also available in smaller packages such as 5 lb. and 1 lb. Contact your local Grabber Branch or Grabber Pro for more information.

Flat Head Wood Screws PS1053 USA-ENG/Rev. 05-25

GRABBER CONSTRUCTION PRODUCTS, INC. 5255 W 11000 N., STE 100 HIGHLAND, UT 84003

(800) 477-8876 | GrabberPro.com

 $\textbf{SAFETY FIRST:} \ We are appropriate personal protective equipment. Read applicable SDS \ and \ literature \ before handling \ and \ installation.$

TECHNICAL INFORMATION: Technical information contained herein is furnished without charge or obligation and is given and accepted at the recipient's sole risk. Because conditions of use may vary and are beyond our control, Grabber Construction Products makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with uses of any product described herein. Grabber Construction Products reserves the right to modify this document without prior notice.







