


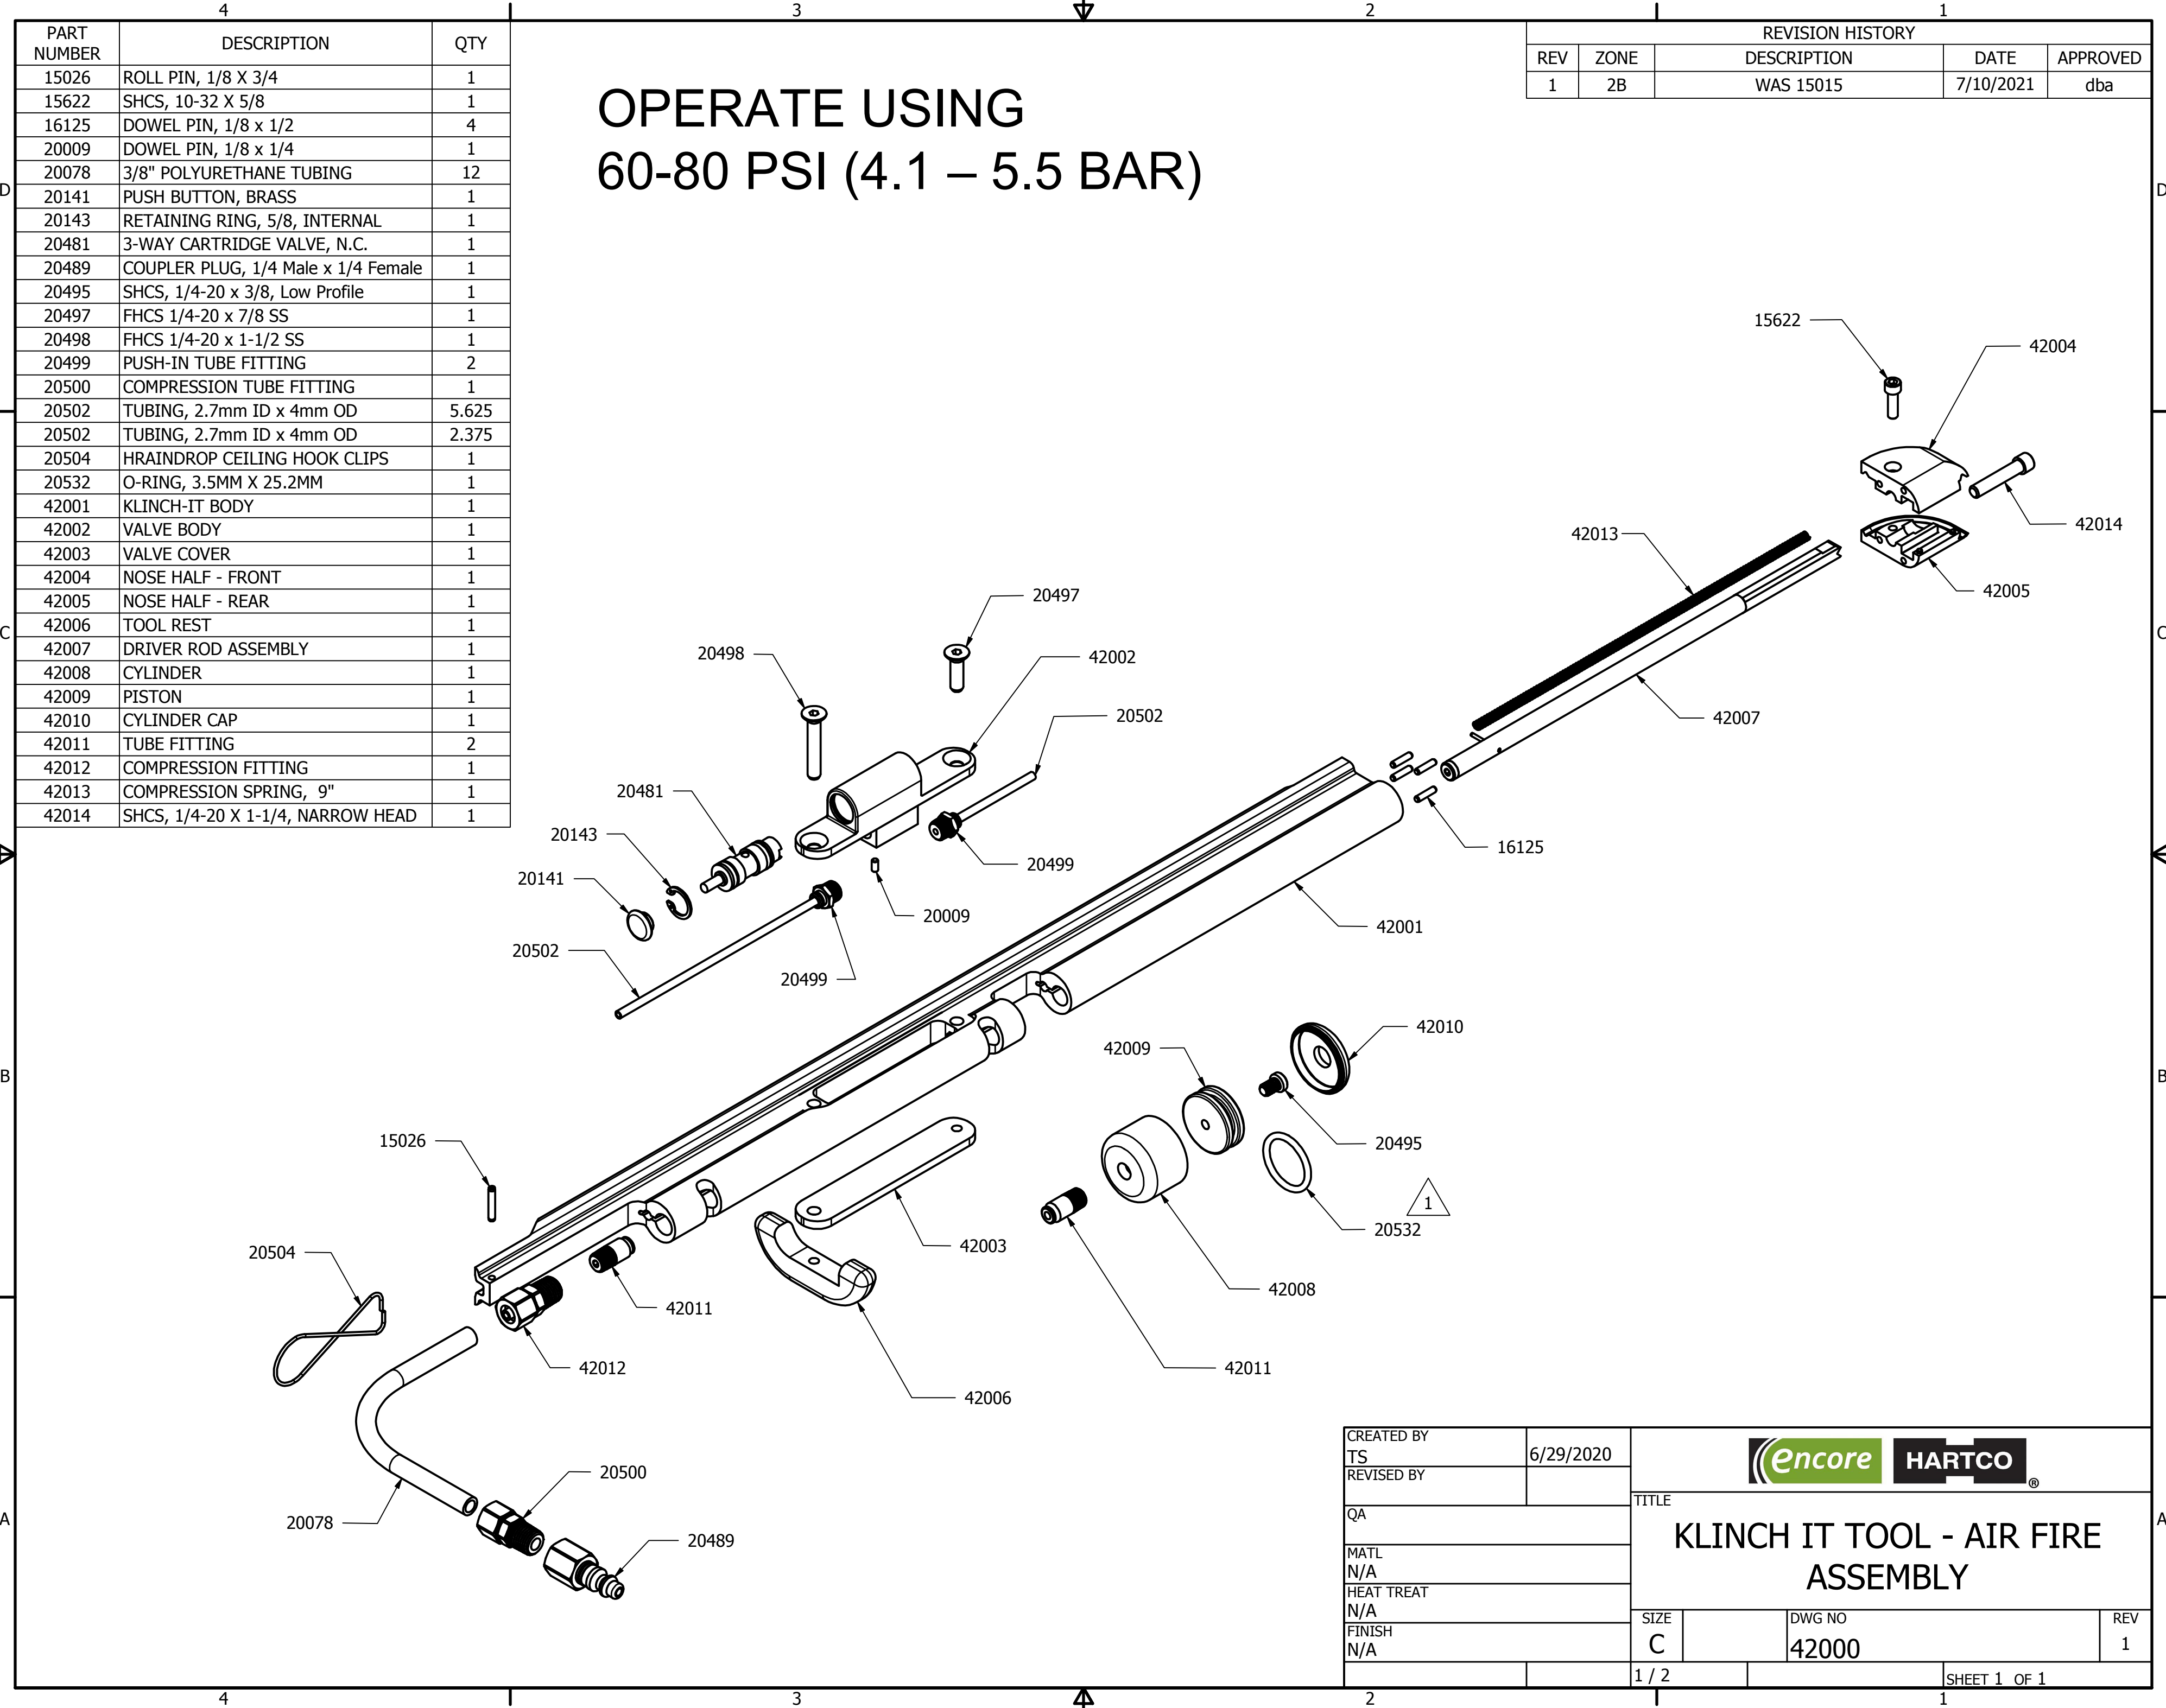

OPERATE USING
60-80 PSI (4.1 – 5.5 BAR)

REVISION HISTORY				
REV	ZONE	DESCRIPTION	DATE	APPROVED
1	2B	WAS 15015	7/10/2021	dba

PART NUMBER	DESCRIPTION	QTY
15026	ROLL PIN, 1/8 X 3/4	1
15622	SHCS, 10-32 X 5/8	1
16125	DOWEL PIN, 1/8 x 1/2	4
20009	DOWEL PIN, 1/8 x 1/4	1
20078	3/8" POLYURETHANE TUBING	12
20141	PUSH BUTTON, BRASS	1
20143	RETAINING RING, 5/8, INTERNAL	1
20481	3-WAY CARTRIDGE VALVE, N.C.	1
20489	COUPLER PLUG, 1/4 Male x 1/4 Female	1
20495	SHCS, 1/4-20 x 3/8, Low Profile	1
20497	FHCS 1/4-20 x 7/8 SS	1
20498	FHCS 1/4-20 x 1-1/2 SS	1
20499	PUSH-IN TUBE FITTING	2
20500	COMPRESSION TUBE FITTING	1
20502	TUBING, 2.7mm ID x 4mm OD	5.625
20502	TUBING, 2.7mm ID x 4mm OD	2.375
20504	HRAINDROP CEILING HOOK CLIPS	1
20532	O-RING, 3.5MM X 25.2MM	1
42001	KLINCH-IT BODY	1
42002	VALVE BODY	1
42003	VALVE COVER	1
42004	NOSE HALF - FRONT	1
42005	NOSE HALF - REAR	1
42006	TOOL REST	1
42007	DRIVER ROD ASSEMBLY	1
42008	CYLINDER	1
42009	PISTON	1
42010	CYLINDER CAP	1
42011	TUBE FITTING	2
42012	COMPRESSION FITTING	1
42013	COMPRESSION SPRING, 9"	1
42014	SHCS, 1/4-20 X 1-1/4, NARROW HEAD	1

CREATED BY TS	6/29/2020			
REVISED BY				
QA		TITLE KLINCH IT TOOL - AIR FIRE ASSEMBLY		
MATL N/A		SIZE C	DWG NO 42000	REV 1
HEAT TREAT N/A				
FINISH N/A				
		1 / 2	SHEET 1 OF 1	