

MAX


CN565S3

Drives 1-1/2" to 2-1/2" flat wire welded nails
Drives 1-1/4" to 2-1/2" flat plastic sheet collated nails


FEATURES

SLIM GUIDE CONTACT ARM

There is no space between the nose and contact arm which guides the nail to the end of the nose preventing wire fragments from being ejected from the tool.



SLIM GUIDE CONTACT ARM MINIMIZES THE APPEARANCE OF DRIVER MARKS

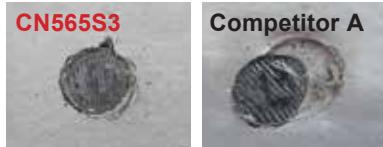

ANTI-DOUBLE FIRE MECHANISM (US PATENT 5597106)




DIAL ADJUSTABLE DEPTH CONTROL



MAINTENANCE FREE END CAP FILTER (US PATENT 5637125)

Prevents foreign substances from entering the tool keeping the inside of the tool clean and prolonging the life of the internal parts. The filter also has a self-cleaning feature. Foreign substances are ejected automatically from the tool when the air hose is disconnected.



EASY TWIST ADJUSTABLE EXHAUST DEFLECTOR

The exhaust deflector can easily be rotated 360° to divert the exhaust air away from the user without using any tools.

APPLICATIONS

Siding Sheathing Subfloors Roof decking Exterior deck

TOOL SPECIFICATIONS

MODEL	CN565S3
WEIGHT	5.2 lbs
DIMENSIONS	11 - 7/8"(H) x 5"(W) x 10 - 7/8"(L)
LOAD CAPACITY	400 nails
OPERATING PRESSURE	70 - 100 psi (Regulator)
AIR CONSUMPTION	0.05 ft³/ cycle (100 psi operating pressure)

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.

SuperSider



RAFTER HOOK



EASY-LOAD MAGAZINE



Driving power
[inch lbs]



573

CN565S3 Conventional tool

536

NAILS APPLICABLE

15 degree flat wire welded coil nails

Head diameter

.197" ~ .236"

Smooth Screw Ring

Nail length

1 1/2"
2 1/2"

Shank diameter

.083" ~ .099"

15 degree flat plastic collated coil nails

Head diameter

.197" ~ .236"

Smooth Screw Ring

Nail length

1 1/4"
2 1/2"

Shank diameter

.083" ~ .099"

MAX USA CORP.

205 Express St, Plainview, NY 11803

TEL: 800-223-4293

www.maxusacorp.com

Dealer