INTRUDER®


UNRESTRICTED VISION, UNRIVALED PROTECTION

Experience ultimate protection and comfort with Intruder® safety glasses. A lightweight, stylish design offers superior impact and debris protection. Integrated nose piece ensures a secure fit. Scratch-resistant lenses for clarity in any environment.

AF
ANTI-FOG OPTIONS

H2MAX
H2MAX OPTIONS

CUSTOM LOGO

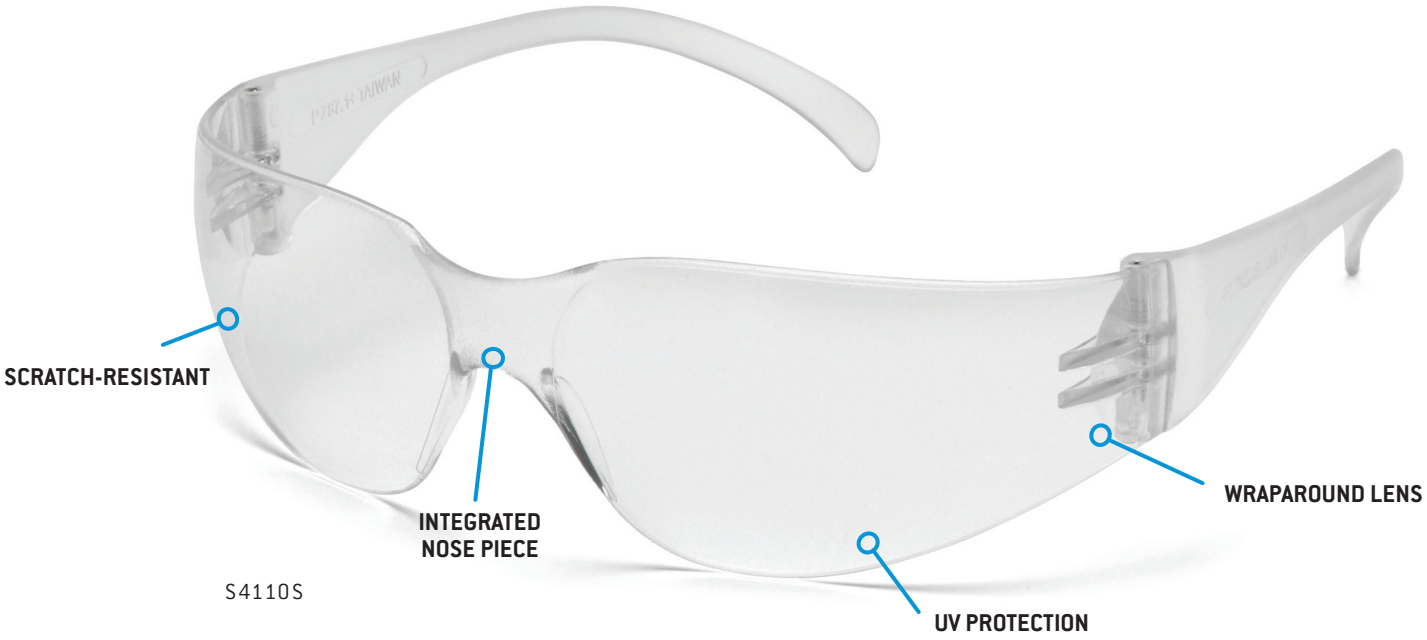

S4110S

FEATURES

Unparalleled Comfort: Experience the ultimate in comfort with these frameless, lightweight safety glasses, ideal for long hours on the job

Enhanced Field of Vision: Panoramic polycarbonate, wraparound lens offers an extended field of vision crucial for safety in busy work environments, while also providing UV protection for comprehensive eye safety

Confident Fit: Integrated nose piece securely positions the glasses, ensuring they stay in place, providing reliable eye protection

Anti-Fog Clarity: (Select styles) Treated with anti-fog properties to guarantee fog-free clarity, even in extreme conditions

Built Tough: (Select styles) Meets ANSI/ISEA Z87.1-2020 +, CSA certified for CAN/CSA Z94.3-20 high impact standards and CE & UKCA certified to EN 166 for eye and face protection devices



SB4110S



SN4110S



SR4110S

INTRUDER®

UNRESTRICTED VISION, UNRIVALED PROTECTION

Experience ultimate protection and comfort with Intruder® safety glasses. A lightweight, stylish design offers superior impact and debris protection. Integrated nose piece ensures a secure fit. Scratch-resistant lenses for clarity in any environment.

AF ANTI-FOG OPTIONS

H2MAX H2MAX OPTIONS

CUSTOM LOGO

VARIATIONS

Lens and Temples | 10 Variations

	S4110S	Clear
	S4110ST	Clear AF
	S4110STM	Clear H2MAX AF
	S4120S	Gray
	S4120ST	Gray AF
	S4120STM	Gray H2MAX AF
	S4130S	Amber
	S4160S	Infinity Blue
	S4170S	Silver Mirror
	S4180S	I/O Mirror

Black Temples | 1 Variation

	SB4110S	Clear

Blue Temples | 1 Variation

	SN4110S	Clear

Red Temples | 1 Variation

	SR4110S	Clear

Lens and Temples | Hang Tag Polybag

	PYS4110S4PK	4 Pack of Clear Lens with Clear Temples

Lens and Temples | Dispenser Box

	S4110SD	12 Pack of Clear Lens with Clear Temples
	S4120SD	12 Pack of Gray Lens with Gray Temples
	S4180SD	12 Pack of I/O Mirror Lens with I/O Temples



S4110SD

MATERIALS

Lens	Temples	Hinge	Screw
Polycarbonate	Polycarbonate	Polycarbonate	Stainless Steel

MARKINGS

Part No.	Lens Marking	Frame Marking
S4110S	P Z87 + U6	P Z87 + / P c SEI Z94.3
S4110ST	P Z87 + U6	P Z87 + / P c SEI Z94.3
S4110STM	P Z87 + U6 X	P Z87 + / P c SEI Z94.3
S4120S	P Z87 + U6 L3	P Z87 + / P c SEI Z94.3
S4120ST	P Z87 + U6 L3	P Z87 + / P c SEI Z94.3
S4120STM	P Z87 + U6 L3 X	P Z87 + / P c SEI Z94.3
S4130S	P Z87 + U6 S	P Z87 + / P c SEI Z94.3
S4160S	P Z87 + U6 S	P Z87 + / P c SEI Z94.3
S4170S	P Z87 + U6 S	P Z87 + / P c SEI Z94.3
S4180S	P Z87 + U6 L1.7	P Z87 + / P c SEI Z94.3
SB4110S	P Z87 + U6	P Z87 + / P c SEI Z94.3
SN4110S	P Z87 + U6	P Z87 + / P c SEI Z94.3
SR4110S	P Z87 + U6	P Z87 + / P c SEI Z94.3

Lens Marking Symbols

P: Manufacturer's mark

Z87: ANSI/ISEA Z87.1-2020 standard for eye and face protection devices

+: High impact

S: Special Purpose

X: Tested Anti-fog

UV Filter Transmittance

U6: .01% max effective far UV • .1% max near UV

Visible Light Filters

L1.7: 55% Max. Visible Light

L3: 18% max visible light

Temple Marking Symbols

P: Manufacturer's mark

Z87: ANSI/ISEA Z87.1-2020 standard for eye and face protection devices

+: High impact

c SEI Z94.3: Certified for CAN/CSA Z94.3-20 standard for eye and face protection devices

Measurements

Weight: 23.1 gm

PD: 64 mm

Bridge: 17.27 mm

Lens base: 10 curve

Lens size diagonal: 77.08 mm

Lens size vertical: 43.38 mm

Lens thickness: 2.5 mm

Overall length (lens - tip): 156 mm

Overall width (hinge - hinge): 135.5 mm

Closest point between lens: 16.67 mm

Product markings may vary // Updated as of 10.25